

HB Products – dedicated to optimal solutions for level measurement and control of oil and refrigerants.

HB Products is a development-oriented company, which specializes in the development and production of sensors for industrial refrigeration systems. Apart from expertise within oil and refrigerant control, we have great know-how in the design and optimization of industrial refrigeration systems. This knowledge enables us to develop and produce the best sensors!

Since its start more than 20 years ago, HB Products has attained a strong global position. This is the result of our ability to think in terms of new technological solutions, create trustworthy products, and provide a high level of service.

For further info and guidance please visit our homepage
www.hbproducts.dk

**Quick guide**

HBCP – Compressor protection

**Functionality:**

The HBCP sensor is made to protect the compressor against liquid hammering. If the HBCP is to be used in a different way, prior approval must be obtained from HB Products.

Download complete manual:

For further information please download the instruction manual from our homepage:
www.hbproducts.dk.


Caution:

Only qualified personnel should work with the product. The technician must be aware of the consequences of an improperly installed sensor, and must be committed to adhering to the applicable local legislation.

**Caution – grease on tip:**

Please note that the sensor electronic tip is protected with silver grease to ensure proper contact. Please use gloves to protect your skin. The type of grease is CW7100 from Chemtronics.

Mechanical installation

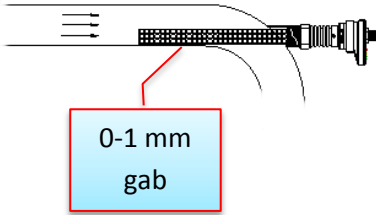

Mechanical specifications:


Ambient temperature: -30...+50°C
Liquid temperature: -60...+80°C
Max. pressure: 100 bar
Material, mechanical: AISI304/PTFE
Thread connection: see packaging.
Refrigerant: NH3 & CO2

Installation guide:

HBCP can be mounted on a pipe bending. It should be placed close to the compressor.

Caution! In case of welding work on the unit, please make sure that proper earthing is carried out to avoid damaging the electronics.

Electrical installation



Supply 24V AC/DC


- 1 = Brown +
- 2 = White -
- 3 = Blue, DO, Alarm, PNP, 1A
- 4 = Black, AO, Control output, 4-20mA
- 5 = Gray, DI, Run in signal (5 to 24 VDC)

Electrical specifications:

Supply: 24 V AC/DC
Power consumption: 0,5 W
Alarm output (pin 2 & 3): Transistor PNP, max 1A
Analog output (pin 2 & 4): 4-20 mA
Activation input signal (pin 2 & 5): PNP, NO
Contact function: NC/NO
Alarms: Low & High
Cable: M12-5 m
Plug: DIN 0627 – M12/5 pins
Enclosure: IP65
Material, electronics: Nylon 6 (PA).

Note! All terminals are protected against improper termination with a supply voltage up to 40 V. If the supply voltage is greater than 40 V the electronics will be damaged.

Configuration of sensor



Sensor is factory programmed for compressor protection. In order to change the control parameters the HB configuration tool is needed.

Download of software:

The tool can be downloaded from our homepage.

NOTE! To be able to change the control parameters, it is necessary to have a special USB/M12 configuration cable as well as the configuration tool installed on a PC.

LED activation:

- 1) Green LED indicates 24 V supply; it blinks during operation.
- 2) Yellow LED indicates liquid hammering (low alarm).
- 3) Red LED indicates liquid hammering (high alarm).

Caution! Factory settings do not guarantee safe operation, since the configuration parameters depend on the system design.

Note! Fault detection on the electronic function can be carried out without releasing pressure from the system or disassembling the mechanical part of the sensor.